

BIANCA SURFACE LED ROUND DOWNLIGHT

DAYLIGHT / 6500K

COOL WHITE / 4000K

WARM WHITE / 3000K



OPTIMUM LIGHT USAGE

Instant Start LED Panel Light, No Delay and Flicker.



SLIM FRAME DESIGN

Slim Frame Design For More Light Exposure.




GREEN ENERGY

Low Heat Emission, Eco-Friendly and Safe For Eyes.




SAFETY GUARANTEED


IC Driver LED Panel Light, Constant Current, Safety Guaranteed.



WARM WHITE




COOL WHITE



DAYLIGHT

Model	Power	Lamp Type	CCT	Lumen	CRI	Beam Angle	Useful Life	Power Factor	Operating Temperature	Main Voltage	Dimension
MLX-RSF01-18W	18W	2835	6500K / 4000K / 3000K	1260LM / 1260LM / 1260LM	>70	120°	20,000 hours	0.6	-20°C ~+50°C	AC 220-240V ~50/60Hz	Ø210 X H28
MLX-RSF01-24W	24W		6500K / 4000K / 3000K	1680LM / 1680LM / 1680LM							Ø285 X H28

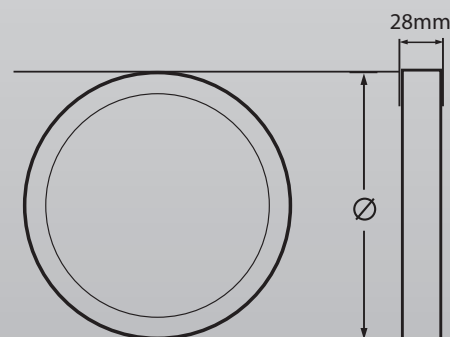

Diameter x Width

MLX-RSF01-18W Ø210 x H28

MLX-RSF01-24W Ø285 x H28

